



**PREMIUM NEXGEN-FYRE™
WOOD BURNING
FIREPLACE INSERT COLLECTION**



**ALL
MODELS
EPA
CERTIFIED**



THE GREATEST COLLECTION OF WOOD FIREPLACE INSERTS IN THE WORLD

Over 40 years ago in 1979, the Lopli® brand of premier stoves and fireplace inserts was born. Ten years later, Travis Industries purchased Lopli® and added the iconic Fireplace Xtrordinair® brand, known as North America's leader in premium fireplaces and fireplace inserts. These two fabulous brands have merged together under one roof to bring you North America's favorite fire.

Together, Lopli® and Fireplace Xtrordinair® present the greatest collection of wood burning fireplace inserts in the world. While all of the wood inserts in this catalog embody the same attention to detail in design, quality and construction, each model is quite unique. The Answer™ and Evergreen™ inserts (pages 4 - 7) is exclusive to the Lopli® brand. The Medium and Large Flush Wood Inserts (pages 8 - 11) are available from both brands and are identical when it comes to their body, construction, features and overall build. All that separates these Lopli™ and Fireplace Xtrordinair™ inserts is the choice of door and face options (see pages 12 - 13). We invite you to take a look at our selection of wood inserts and designer faces and choose the style that best suits your home.

Our heating appliances are designed and hand-assembled at our state-of-the-art factory in Mukilteo, Washington. Each insert comes with our seven year warranty. After all, we have the experience and confidence to stand behind every single product we make, so we put it in writing.



Lopli® and Fireplace Xtrordinair® are not so much brand names as they are a tradition of craftsmanship in the construction of our wood inserts and of pride to the families who own them. We invite you to share this proud tradition.

Kurt W. F. Rumens
President, Travis Industries

WOOD HEAT IS GREAT FOR YOU!

Energy Independence

The expense of heating your home with oil, gas or electricity keeps going up. Our wood inserts deliver both radiant and convective heat that comfortably warms your home for a fraction of what you'd pay for standard utilities.

No Power? No Problem!

Our wood inserts are designed to keep you warm and cozy under any circumstance. These inserts do not require the blowers to be on to operate and feature natural convection heat that will warm your home without the use of power, making them a reliable heat source during power outages.

Exclusive NexGen-Fyre™ Technology

NexGen-Fyre™ takes our non-catalytic wood burning technology to the next level! With NexGen-Fyre™, primary and secondary combustion are harnessed to create the ultimate blended combustion system. This produces beautiful, balanced fires with double the BTU range, up to 50% greater heat output, and longer burn times than any other non-catalytic technology.



4

LOPI® ANSWER™ NEXGEN-FYRE™

Small Insert with Great Convective Heat

The Answer™ is an excellent choice for heating an individual room or small home. It conserves space by mounting almost flush to your existing masonry or zero clearance fireplace. This insert offers advanced features like a five-sided convection chamber to evenly distribute warm air, and a single air control for easy regulation of burns and heat output. The Answer's 1.5 cubic foot firebox is large enough to hold an 18" log while providing long burn times.

Options

- Small One Piece Panel: 28-1/2" H x 40" W
- Large One Piece Panel: 30-1/2" H x 42" W
- Custom Panels also available through your Lopi Dealer
- 130 CFM Convection Fan

Specifications

Emissions: 2.0 Grams Per Hour
 Heating Capacity:* 750 to 1,200 Square Feet
 EPA Tested BTU Range: 12,129 to 59,527 BTUs Per Hour
 Real World BTUs: EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

Maximum Burn Time: Up to 8 Hours
 Efficiency:** 72.4% HHV
 Glass Viewing Area: 135 sq. in (15-1/4" W x 9-1/4" H)
 Firebox Size: 1.5 Cubic Feet
 Maximum Log Size: 18"
 Weight: 285 Pounds

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.
 ** As tested using B-415.1 using Cord Wood. HHV = High Heat Value

Construction: 5/16" to 3/16" Steel Plate

Small - 28-1/2" (724mm)
 Large - 30-1/2" (775mm)

6" (152mm) Dia.
 5-7/8" (148mm)
 8-3/8" (213mm)
 28-5/8" (600mm)
 3/4" (19mm)

Small - 40" (1016mm)
 Large - 42" (1067mm)

14-1/4" (362mm)
 16-1/4" (413mm)

20" (508mm) to Top of Insert
 20-3/4" (528mm) To Top of Flue

Scan this QR code to watch a video of this model burning.

Shown with the optional convection fan and seamless one-piece panel.

5

UP TO \$2,000
 THE HOPE QUALIFIES FOR
 THE U.S. ENERGY TAX CREDIT

Learn More Here




Shown with the optional convection fan and seamless one-piece panel.



Scan this QR code to watch a video of this model burning.

EVERGREEN NEXGEN-FYRE™



A Contemporary Insert with Big Heat


The mid-sized Evergreen NexGen-Fyre™ Wood Insert hits the mark on performance, function and design. This sleek stove features clean lines and complements any home's décor while artfully presenting heavy gauge steel, unibody construction and a cast iron door with a large, self-cleaning ceramic glass viewing area. The Evergreen's standard bypass damper gives you full control over the flow of smoke inside this stove, eliminating smoky startups and reloads.

Options

- Small One Piece Panel: 30-1/2" H x 42" W (Optional Trim Kit available)
- Large One Piece Panel: 34" H x 44" W (Optional Trim Kit available)
- Custom Panels also available through your Lopi Dealer
- 130 CFM Convection Fan

Specifications

- Emissions:
 1.5 Grams Per Hour
 Up to 2,000 Square Feet
- Heating Capacity*
 12,772 to 70,720 BTUs Per Hour
 EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.
- Real World BTUs:
 77.1% HHV
- Construction:
 Heavy-Duty 5/16" to 3/16" Steel
- Glass Area:
 183 Sq. In. (16-7/8" W x 10-7/8" T)
- Maximum Burn Time:
 Up to 10 Hours
- Firebox Size:
 2.2 Cubic Feet
- Maximum Log Size:
 20-1/2 Inches
- Bypass Damper:
 Yes
- Weight:
 405 Pounds

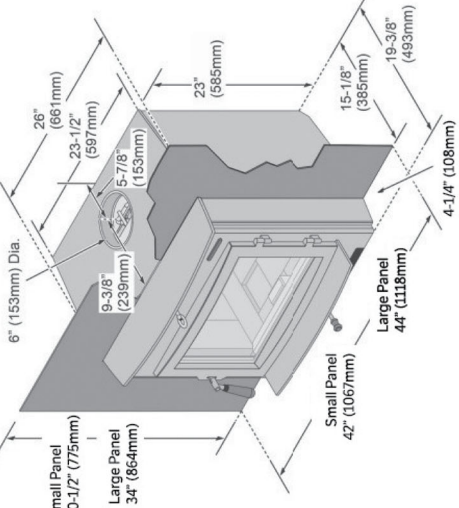

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.
 ** As tested using B-415.1 using Cord Wood. HHV = High Heat Value

8

9

MEDIUM FLUSH WOOD NEXGEN-FYRE™

**FIREPLACE
XTRORDINAIR**

A Mid-Sized Flush Insert that Provides Extraordinary Heat

The Medium Flush Wood NexGen-Fyre™ Insert converts a wasteful masonry or zero clearance fireplace into an excellent heat source that can provide reliable warmth at a fraction of the cost of electricity or oil. With a three-sided convection chamber and standard 180 CFM convection fan, this insert is designed to deliver the maximum heat output from the wood you burn due to our advanced NexGen-Fyre™ technology. The standard bypass damper gives you full control over the flow of smoke inside this stove, eliminating smoky startups and reloads.

This model is sold under both the Lopi® and Fireplace Xtrordinair® brands. They feature identical bodies and the only difference is your choice of face designs. We have combined all of the face designs in this catalog so you can easily choose the look that best fits your home decor.

Options

- Six Lopi® and Fireplace Xtrordinair® face designs to choose from (see pages 12 & 13)
- Choice of Arched or Rectangular Door designs
- Small One Piece Panel: 30-1/2" H x 42" W (Optional Trim Kit available)
- Large One Piece Panel: 34" H x 44" W (Optional Trim Kit available)
- Hidden Wiring Kit
- **GREENSTART** Igniter

Specifications

Emissions: 2.4 Grams Per Hour (Cord Wood)

Heating Capacity*: 1,200 to 2,000 Square Feet

EPA Tested BTU Range: 15,583 to 55,395 BTU's Per Hour

Real World BTUs: EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

Efficiency:** 72% HHV

Maximum Burn Time: Up to 10 Hours

Firebox Size: 2.2 Cubic Feet

Maximum Log Size: 24 Inches

Weight: 450 Pounds

Construction: 5/16" to 1/4" Steel Plate

Bypass Damper: Yes

Glass Viewing Area: 22-5/8" W x 10" H

(216 Sq. In. Arch)

(227 Sq. In. Rect)

*Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Cord Wood.

HHV = High Heat Value.

*You will need a fireplace opening of 34-7/8" wide measured 4" back from the front if you are using the GreenStart® Igniter option.

LARGE FLUSH WOOD NEXGEN-FYRE™



One of the Cleanest Burning Large Wood Inserts on the Planet

When compared to any other large wood insert on the market, you will find that our Large Flush NexGen-Fyre™ Insert offers you the best choice in looks, construction, and performance. The flush design does not extend onto the hearth to offer a classic, finished look. NexGen-Fyre™ technology and premium quality materials combined with beauty and optimum performance bring you a 'best in class' insert that will heat your home for years to come. The standard bypass damper gives you full control over the flow of smoke inside this stove, eliminating smoky startups and reloads.

This model is sold under both the Lopi® and Fireplace Xtordinair® brands. They feature identical bodies and the only difference is your choice of face designs. We have combined all of the face designs in this catalog so you can easily choose the look that best fits your home decor.

Options



- Seven Lopi® and Fireplace Xtordinair® face designs to choose from (see pages 12 & 13)
- Choice of Arched or Rectangular Door designs
- Small One Piece Panel: 32-1/2" H x 42" W (Optional Trim Kit available)
- Large One Piece Panel: 35" H x 47" W (Optional Trim Kit available)
- **GREEN START** Igniter
- Hidden Wiring Kit

Specifications

- Emissions: 1.7 Grams Per Hour (Cord Wood)
- Heating Capacity:* 1,500 to 2,500 Square Feet
- EPA Tested BTU Range: 17,900 to 66,736 BTU's Per Hour
- Real World BTUs: EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.
- Efficiency:** 73% HHV
- Maximum Burn Time: Up to 12 Hours
- Firebox Size: 3.0 Cubic Feet
- Maximum Log Size: 24 Inches
- Weight: 530 Pounds
- Construction: 5/16" to 1/4" Steel Plate
- Bypass Damper: Yes
- Glass Viewing Area: 24-1/2" W x 13" H (307 Sq. In. Arch's) (319 Sq. In. Rect.)

*Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.
 **As tested using B-415.1 using Cord Wood. HHV = High Heat Value.

*You will need a fireplace opening 40-3/4" wide if you are using the GreenStart™ igniter option.

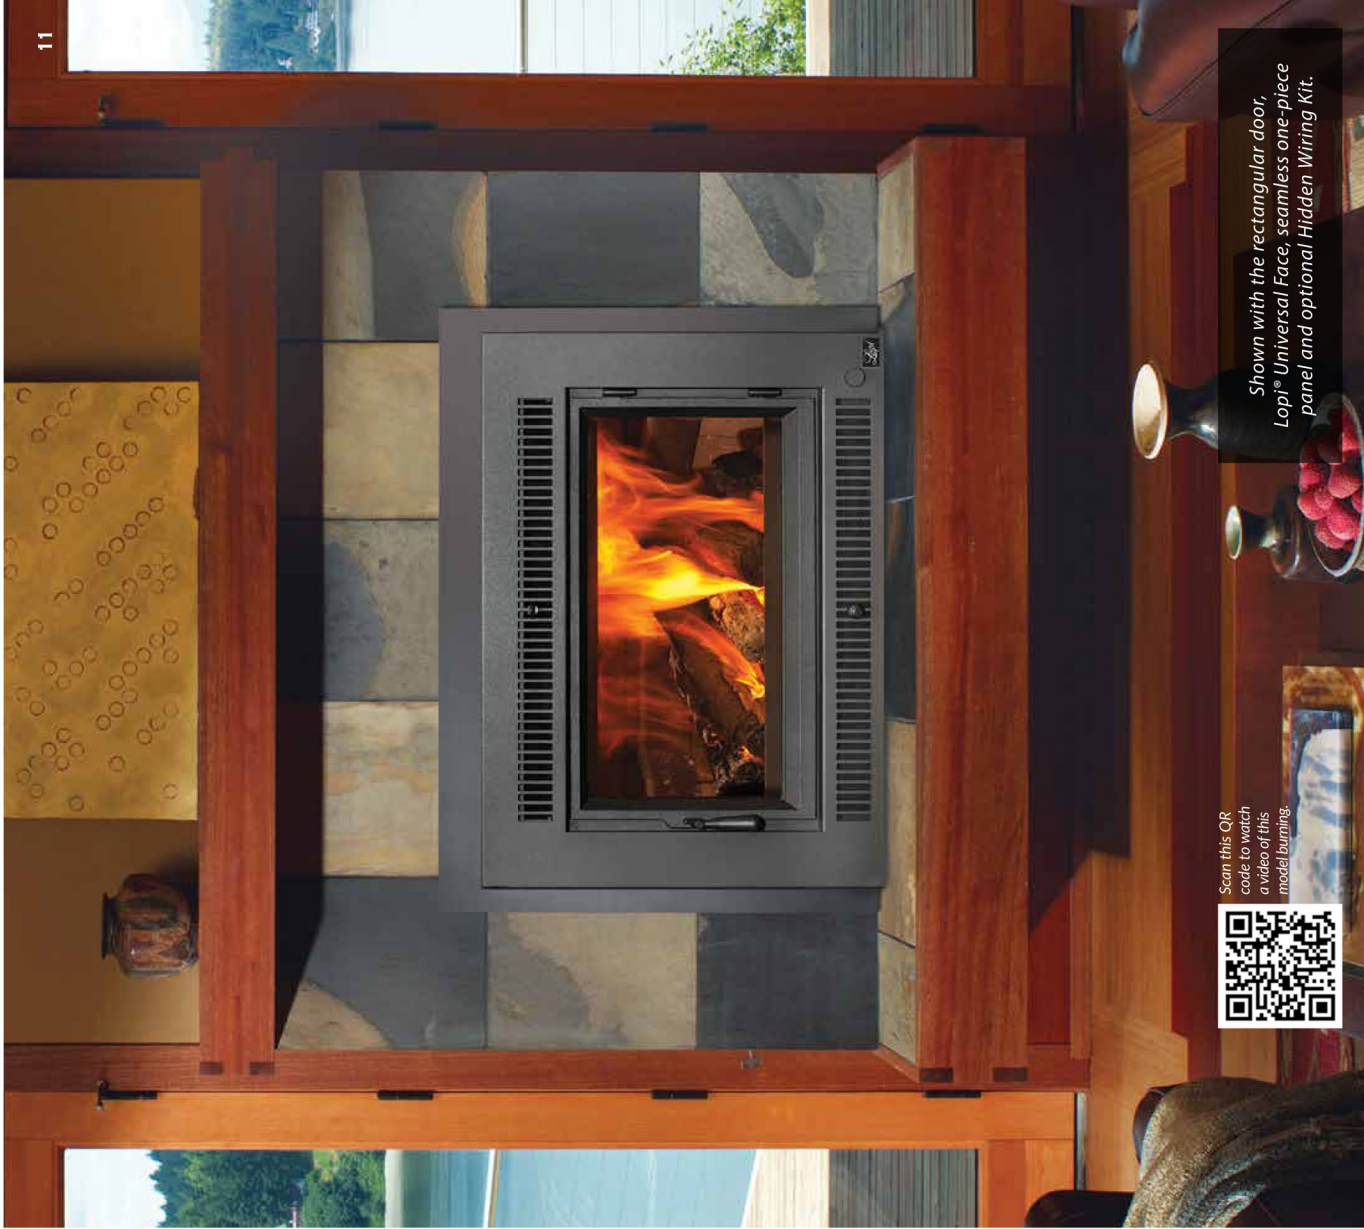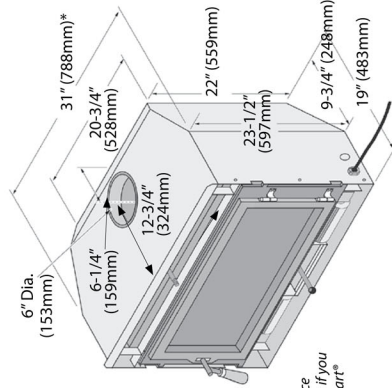

Scan this QR code to watch a video of this model burning.



Shown with the rectangular door, Lopi® Universal Face, seamless one-piece panel and optional Hidden Wiring Kit.



FACE DESIGNS

Both Lopi® and Fireplace Xtordinaire® feature their own unique architectural styles of arched and rectangular face designs. We invite you to take a look at our selection of designer faces below and choose the style that best suits your home.

ARCHED FACE DESIGNS



CLASSIC ARCH™ FACE

Metallic Black paint finish*
 Medium Flush Wood - 33-1/4" W x 23-3/4" H
 Large Flush Wood - 35-1/4" W x 26-3/8" H



ARTISAN™ HAND-FORGED, HAND-HAMMERED IRON FACE

(Limited to stock on hand)
 New Iron paint finish*
 Large Flush Wood Only 35-1/4" W x 26-3/8" H



FACE DESIGNS

*Our faces are painted with Stove Bright™ high temperature stove paint. The finish color in pictures may appear lighter than the actual color seen in your home setting. Ask your dealer to show you a sample of the actual paint finish.

ARCHED FACE DESIGNS



WILMINGTON™ FACE

Metallic Black paint finish*
 Medium Flush Wood - 33-3/8" W x 23-1/4" H
 Large Flush Wood - 35-3/8" W x 26-1/4" H



BOSTON™ FACE

New Iron paint finish*
Only available for the Large Flush Wood
 36-1/4" W x 25" H

RECTANGULAR FACE DESIGNS



METROPOLITAN™ FACE

Metallic Black paint finish*
 Medium Flush Wood - 33-3/8" W x 23-1/4" H
 Large Flush Wood - 35-3/8" W x 26-1/4" H



SHADOWBOX™ FACE

Metallic Black paint finish*
 Medium Flush Wood - 35-3/4" W x 22-1/8" H
 Large Flush Wood - 37-3/4" W x 25-1/8" H

RECTANGULAR FACE DESIGNS



UNIVERSAL FACE

Metallic Black paint finish*
 Medium Flush Wood - 33-3/8" W x 23-1/4" H
 Large Flush Wood - 35-3/8" W x 26-1/4" H



TIMES SQUARE™ FACE

Metallic Black paint finish*
 Medium Flush Wood - 35-3/4" W x 22-3/4" H
 Large Flush Wood - 37-3/4" W x 25-3/4" H



BOSTON™ FACE

New Iron paint finish*
Only available for the Large Flush Wood
 36-1/4" W x 25" H

7-YEAR "REAL WORLD" WARRANTY

Our 7-Year Warranty offers more protection on key components than the so-called "Limited Lifetime" warranties of our competitors. Lopi® builds inserts to last a lifetime.

We'll stand behind the quality and performance of our products year after year because that's the way we do business - and you don't have to read the fine print for your peace of mind.

YEARS 1-2:

All parts and labor on your wood burning appliance, including blower and one-way freight allowance.



YEARS 3-5:

All parts and labor on the firebox, door assembly, air control assemblies and one-way freight allowance.

YEARS 6-7: Parts only on firebox, door and air control assemblies.



Large Flush NexGen-Fyre™ shown with the rectangular door, Boston™ Face, seamless one-piece panel, and optional Insert Wiring Kit.

DESIGN MY FIRE

Be your own designer with our new and enhanced Design My Fire feature! Pick your insert model, accessories and extras, then snap a photo of your room and upload it to see what your new fire will look like in your room! Visit our website at FIREBUILDER.TRAVISINDUSTRIES.COM



FREE MOISTURE METER

Testing the moisture level in your wood is a crucial, yet often ignored step when burning a fire. Wet wood creates excessive smoke and moisture in the firebox, whereas dry wood allows for a hotter, more efficient burn. Lopi® includes a FREE moisture meter with your wood insert so you can ensure that you're burning dry wood and getting the highest performance out of your insert.



DARE TO COMPARE! CONSTRUCTION

We build the finest wood burning inserts on the planet. Proudly built in the USA, our wood inserts are designed to stand up to the rigors of time. When you buy a Lopi® or Fireplace Xtordinair®, you're buying the best.

- Strong and durable unibody construction
- Heavy duty 5/16" & 1/4" steel
- High temperature ceramic glass
- Stainless steel air tubes
- Perforated airwash keeps the glass clean



Cast iron door features a raised, pinched door seal and secure locking door handle that ensures an air-tight seal around the glass, so the door will never warp or flex. The frame also protects the glass gasket from direct contact with the fire.



The bypass damper gives you full control over the flow of smoke inside the unit. This allows you to start and maintain your fires quickly and easily by eliminating smoky startups and reloading. (Not available on the Answer™ model)



We use real kiln-fired, refractory firebrick in the firebox. This is the same material used to line commercial boilers and furnaces, and is twice the weight of typical brick. The brick protects the steel while increasing the internal temperature within the firebox.



Our single air control is easier to fine tune to your heating needs by regulating both primary and secondary air to the insert. The result is easy operation with optimum efficiency and control throughout the burn cycle.




Medium Flush Wood NexGen-Fyre™ shown with the rectangular door, FireplaceX® Metropolitan Face™ and seamless one-piece panel.

DARE TO COMPARE! PERFORMANCE

EPA Cord Wood Tested

Most manufacturers test to the old crib wood standard, which produces great lab results, however does not give you real world measurements on how the unit will operate in your home. Testing with cord wood produces true real world measurements that can be duplicated in your home.



Cord wood Crib wood



Scan this QR code to watch a video on the benefits of testing with cord wood, why a wide BTU range is important, and the difference between HHV & LHV efficiencies.

Wide BTU Range

The low to high BTU heating range of a wood burning appliance is a great indicator of its performance. The wider the BTU range, the better the unit's performance. Low BTUs represent control and overnight burns. High BTUs deliver more heat into your home at a faster rate, allowing your cold home to heat up quicker. Lopi® and Fireplace Xtordinair® feature wider BTU ranges than any other wood insert brand, giving you the ability to meet all of your heating needs.

Efficiency Numbers

There are two different numbers used to calculate efficiency: HHV (High Heating Value) or LHV (Low Heating Value)

The EPA requires all wood burning appliances to have their efficiency measured and listed on the EPA website. EPA publishes the OE (Overall Efficiency) HHV number in all consumer data. There is a difference in what manufacturers are choosing to market for efficiency.

The LHV number always shows a higher efficiency because it assumes the wood has 0% moisture content. This will never happen, even with dry, seasoned cord wood! The LHV method is theory based and misleads consumers into thinking they are buying a more efficient wood heater.

The HHV efficiency number reflects the actual energy transferred into your home. This method certifies the percentage of moisture content in the wood during the EPA test and calculates the heat transfer. This is based on 19% - 24% moisture content in the wood, which is what the average consumer should be using.

Our No-Nonsense Approach

We publish both numbers so you can compare apples to apples and get a true understanding of each unit's performance (HHV). This will help eliminate any confusion on the excellent efficiencies and wide heating ranges of our wood burning inserts.



Scan this QR code to view the EPA's official list of certified wood burning appliances.



Large Flush Wood NexGen-Fyre™ shown with the rectangular door, FireplaceX® Shadowbox Face™, seamless one-piece panel and optional Hidden Wiring Kit.

GREEN START®

PUSH BUTTON START UP, THE GREATEST WOOD INSERT OPTION EVER!



FIREPLACE
XTRORDINAIR



The compressor assembly that comes with the GreenStart® igniter may be placed on the floor or hearth, away from the insert. It may also be placed in a ventilated enclosure or remote location. If it is placed in a remote location, make sure it is accessible.



Large Flush Wood NexGen-Fyre™ shown with the arched door, Logi® Wilmington Face™, seamless one-piece panel, optional GreenStart® Igniter and optional Hidden Wiring Kit.

PUSH A BUTTON



START YOUR FIRE

Hot surface igniter blows 1,400 degree heated air into the firebox, igniting the wood.



Starting a fire in your wood insert is now as convenient as pushing a button. The patent-pending GreenStart® ignition system eliminates the mess of starting a fire with matches and newspaper, while increasing safety at the same time.

The GreenStart® system is perfect for refreshing a fire; simply open the bypass damper, add new fuel to the hot coals, push the button twice and the igniter adds enough air to ignite the hot coals. There is no need to blow on the coals or leave the door ajar, it's that easy!

(Not available on the Answer™ or Evergreen™ Inserts)

Blower continues to fan fire at various speeds to deliver proper draft in the chimney and a vigorous fire.


Blower shuts down. Homeowner adjusts bypass damper and air control to maintain fire.

SIZING YOUR INSERT TO YOUR FIREPLACE

Our wood inserts allow you to enjoy a gorgeous, glowing fire without losing heat out of your chimney. These inserts are designed to transform virtually any masonry or zero clearance (metal) fireplace into an efficient source of heat. Traditional, open fireplaces can have efficiency ratings as low as 15%, and depending on the condition, can actually draw the heat out of your home for a net heat loss. Our wood burning inserts achieve maximum efficiency ratings as high as 73%.



Typical Masonry Fireplace



Your Fireplace Measurements

- E. = Depth
- F. = Front Width
- G. = Back Width
- H. = Height
- I. = Hearth Depth

Approved ZC Fireplaces
Must be manufactured by one of the following companies:

- Marco
- Heatiator
- Tempco
- Heat N Glo
- Martin
- Majestic
- Preway
- Superior
- Lennox
- Monesson

See the Owner's Manual for details.

SPECIFICATIONS

Determine which insert is best for your home based on your fireplace size and heating requirements.


For installation specifications, refer to the Owner's Manuals found on the Lopi® or FireplaceX® websites.



SPECIFICATIONS	SMALL INSERT	EVERGREEN	MEDIUM INSERTS	LARGE INSERT
	ANSWER NEXGEN-FYRE™	NEXGEN-FYRE™	NEXGEN-FYRE™	LARGE FLUSH WOOD NEXGEN-FYRE™
Width	23-5/8"	26" front, 23-1/2" back	28-7/8" front, 18-7/8" back	31" front, 20-3/4" back
Height	20-3/4"	23"	21-1/2" front, 19-3/4" back	23-3/4" front, 22-1/4" back
Depth (overall)	16-1/4"	19-3/8"	19"	19"
Depth on Hearth	2"	4-1/4"	0"	0"
Depth into Fireplace	14-1/2"	15-1/4"	19-1/8"	19-1/8"
Flue Size	6"	6"	6"	6"
Construction	Up to 3/16"	Up to 5/16"	Up to 5/16"	Up to 5/16"
Weight (body)	285 lbs.	405 lbs.	450 lbs.	530 lbs.
PERFORMANCE				
Emissions - COID WOOD TESTED	2.0 Grams/Hr.	1.5 Grams/Hr.	2.4 Grams/Hr.	1.7 Grams/Hr.
Heating Capacity	Up to 1,200 Sq. Ft.	Up to 2,000 Sq. Ft.	Up to 2,000 Sq. Ft.	Up to 2,500 Sq. Ft.
EPA Tested BTUs Cord Wood	12,129 to 59,527	12,772 to 70,720	14,483 to 55,395	17,900 to 66,736
"Real World BTUs**	See Below*	See Below*	See Below*	See Below*
Overall Efficiency HHV, LHV	Up To 72% HHV, 78% LHV	Up To 77% HHV	Up To 73% HHV, 78% LHV	Up To 73% HHV, 79% LHV
Maximum Burn Time	Up To 8 Hours	Up To 10 Hours	Up To 10 Hours	Up To 12 Hours
Firebox Size	1.5 Cubic Ft.	2.2 Cubic Ft.	2.2 Cubic Ft.	3.0 Cubic Ft.
Maximum Log Size	Up to 18"	Up to 20-1/2"	Up to 24"	Up to 24"

*EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

CLEARANCES TO COMBUSTIBLES & HEARTH PROTECTION

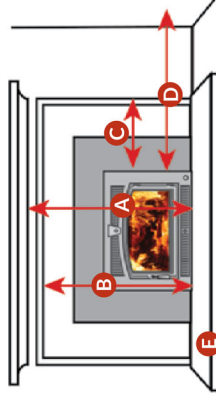

	SMALL INSERT	EVERGREEN	MEDIUM INSERTS	LARGE INSERT
	ANSWER NEXGEN-FYRE™	NEXGEN-FYRE™	NEXGEN-FYRE™	LARGE FLUSH WOOD NEXGEN-FYRE™
Masonry	Masonry	Masonry & Metal (ZC)	Masonry & Metal (ZC)	Masonry & Metal (ZC)
Metal (ZC)	Masonry	Masonry & Metal (ZC)	Masonry & Metal (ZC)	Masonry & Metal (ZC)
A = Insert Base to Mantel	35-1/2"	44"	43"	41"
B = Insert Base to Top Facing	32"	32"	36-3/4"	37"
C = Insert Side to Side Facing	9-1/2"	12"	9"	5-1/2"
D = Insert Side to Side Wall	13"	13"	18"	10-1/2"
E = Minimum Non-Combustible Hearth	Wide 35-5/8" US 39-5/8" CAN Depth 18" US, 20" CAN	Wide 38" US, 42" CAN Depth 20-1/4" US, 22-1/4" CAN	Wide 44-7/8" US, 48" CAN Depth 16" US, 18" CAN	Wide 47" US, 51" CAN Depth 16" TO 20" US *See Owner's Manual for details

*Minimum fireplace depth can be reduced by 1-1/4" (36mm) when using the optional panel trim
**GreenStart® igniter option requires additional firebox width measured 3" from front of fireplace opening.

PROFESSIONAL HEARTH RETAILERS

Only the most professional specialty hearth retailers are authorized to sell Lopi® and Fireplace Xtrordinair® appliances. They represent our total commitment to exceptional products and excellent service. In addition, they have successfully completed special training programs in the proper selection, installation, and service of all Lopi® and Fireplace Xtrordinair® appliances.

Our professional hearth dealers are experts who can advise you on everything from customizing the color of your appliance to selecting appropriate venting and chimney materials.



SAFETY PRECAUTIONS

Children, like most of us, are fascinated by fire. For families with young children, inserts pose a potential safety hazard. Take the time to educate young children about the dangers of fire and the hot surface temperatures of glass and metal surrounding your wood burning appliance. If you have an infant or toddler, consider installing a firescreen; make sure it's tall enough so that children can't climb over it, and it's placed far enough away so that reaching arms can't touch the surfaces of the appliance. A few precautions such as these will allow everyone in your home to safely enjoy the comfort and warmth of your new insert.

VENTING ACCESSORIES




WOOD VENTING

We have partnered with Duravent® Mfg. to offer several great cost effective venting options specifically designed for our wood inserts.

WOOD MASONRY AND ZC LINER KITS

All optional vent kits include 6" 304 SS flex pipe, insert adapter, top plate and cap. Available in 25' and 35' lengths.

Ask your local dealer for details.



Lopi® and Fireplace Xtrordinair® manufacture a wide variety of quality wood, pellet, and gas hearth appliances. Find your favorite fire today by visiting firebuilder.travisindustries.com

YOUR AUTHORIZED DEALER:



Manufactured in Mukilteo, WA
By Travis Industries, Inc.



Travis Industries Wood Burning Stoves and Inserts are protected by one or more of the following patents; U.S. 9,170,025, 4,665,889 as well as other U.S. and Foreign Patents pending. Travis Industries reserves the right to alter or improve its products at any time without notification. All trademarks belong to Travis Industries. For installation specifications refer to the Owner's Manual found on our consumer websites. ©01/2023 #98801038